



100,000MAX EARTH DRILL



PART OF THE HEAVY DUTY RANGE

With over 73,000 ft-bl of Torque, this drive is the perfect choice for high torque applications on excavators between 21T – 50T.

Whether you are looking for pre-augering, core barerlling, hard rock augering, this unit has been proven to work in the toughest conditions and at times in restrictive locations.

From drilling through bluestone rock in Southern Australia to landfill sites in France, screw piling as part of an airport expansion in Thailand or defence retaining walls on the sea front in Scotland – this unit has been tried and tested.

Auger Torque can offer you the full solution for your application requirement including alignment and data logging tools.



AXIAL PISTON MOTOR

Axial Piston Motors allow us to run a single speed motor. By using an axial piston motor with our drive we can have a high speed motor but still achieve high torques through the gearbox multiplication. At maximum flow we achieve 15 rpm.

EPICYCLIC GEARBOX

Torque is amplified by using the unique Auger Torque planetary gearbox. This system allows the motors output torque to be multiplied with extreme efficiency as well as ensuring the durability and reliability you need.

SINGLE PIECE NON-DISLODGE SHAFT

As standard with all of our auger & screw pile drives, our patented single-piece non-dislodgement shaft is of course a standard feature. We are so confident in this must have safety feature that we are covering it with a lifetime warranty.



5.9 INCH HEX SHAFT

The driveshaft is crucial for reliability and it goes without saying that the bigger the better applies here. A shaft is always stronger when machined as a hex and the 5.9 inch diameter is the largest in the industry, especially when looking at compatibility on machine as small as 21T.

www.augertorqueusa.com

CALL +1 770 741 0180

EMAIL sales@augertorqueusa.com

OR CONTACT YOUR NEAREST DEALER

100,000MAX EARTH DRILL

Features

- › Up to 73,807 ft-lb of Torque
- › Up to 15 rpm rotational speed
- › Massive 5.9in Hex Shaft
- › Large main shaft bearings
- › Non-Dislodgement Shaft
- › Life time non-dislodgement guarantee
- › Low-weight at just over 2,300 lb
- › Suitable for tight access applications
- › Single-piece driveshaft
- › Compatible with the In-Site product range
- › Covered by Auger Torque's industry leading warranty

Applications

- › Large diameter & deep auger drilling
- › Hard Rock Auger drilling
- › Core barrel drilling
- › Screw Pile installations
- › Pole and mast installations
- › Foundation piles
- › Rail applications

SPECIFICATIONS

SUITABLE FOR EXCAVATORS

21 - 50T

Torque Range: 33,741 - 73,807 ft-lb (45,746 - 100,069 Nm)

Oil Pressure Range: 2321 - 5,076 psi (160 - 350 Bar)

Oil Flow Range: 26.4 - 74.0 gpm (100 - 280 lpm)

Speed Range: 5 - 15 rpm

Unit Height: 63.90in (1,623mm)

Unit Diameter: 25.04in (636mm)

Unit Weight: 2,339 lbs (1061 kg)

OUTPUT SHAFT


5.9 inch (150mm Hex)

HITCH OPTIONS

Double Pin Cradle

VALVE OPTIONS

2 Way Valve - Converts single acting hammer into a 2 way auxiliary flow

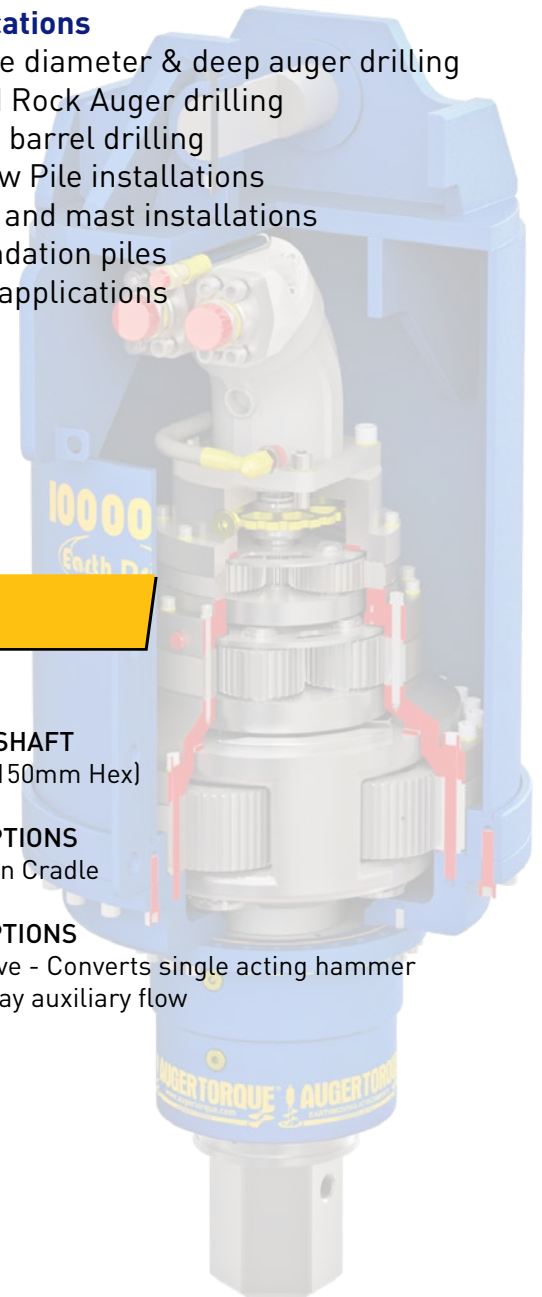

Part of the Auger Torque Earthmoving range

EARTH DRILLS



AUGERS & WEAR PARTS



MULCHERS



TRENCHERS

www.augertorqueusa.com

CALL +1 770 741 0180

EMAIL sales@augertorqueusa.com

OR CONTACT YOUR NEAREST DEALER

99-97853 REV 4-1